

### Applicable Military Standards

Military Test Items	American Standard	810C		810D		810E		810F	
		Method	Procedure	Method	Procedure	Method	Procedure	Method	Procedure
Low Pressure		500.1	I	500.2	I,II	500.3	I,II	500.4	II
High Temperature		501.1	I,II	501.2	I,II	501.3	I,II	501.4	I,II
Low Temperature		502.1	I	502.2	I,II	502.3	I,II	502.4	I,II
Temp. Shock		503.1	I	503.2	I	503.3	I	503.4	I
Solar Radiation		505.1	I	505.2	I	505.3	I	505.4	I
Rain		506.1	II	506.2	II	506.3	I,II	506.4	I
Humidity		507.1	II	507.2	II,III	507.3	II,III	507.4	I
Salt Fog		509.1	I	509.2	I	509.3	I	509.4	I
Dust		510.1	I	510.2	I	510.3	I	510.4	I
Vibration		514.2	VIII,X	514.3	I	514.4	I	514.5	I
Shock		516.2	I,II,V	516.3	I,IV	516.4	I,IV	516.5	IV

### General

Frequency Range	446.00625-446.09375MHz
Channel Capacity	16
Channel Spacing	12.5KHz
Operating Voltage	7.4V DC
Standard Battery	2000mAh (Li-ion)
Battery Life (5-5-90 Duty Cycle)	25hours
Frequency Stability	± 2.5ppm
Operating Temperature	-25~+65°C
Dimensions (H×W×D)(with battery, without antenna)	119mm×55mm×36mm
Weight (with antenna & battery)	282g
Shock & Vibration	Compliant with MIL-STD 810 C/D/E/F
Dust & Humidity	IP66

### Transmitter

RF Power Output	≤0.5W
Modulation	11KΦF3E
Spurious and Harmonics	-36dBm ( frequency <1GHz ) -30dBm ( frequency >1GHz )
Modulation Limiting	≤2.5KHz
Audio Distortion	≤5%

### Receiver

Sensitivity	0.25/0.28 μ V
Adjacent Channel Selectivity	≥60dB
Intermodulation	≥60dB
Spurious Response Rejection	≥70dB
S/N	≥40dB
Rated Audio Power Output	800mW
Rated Audio Distortion	≤5%(800mW)

All Specifications are tested according to applicable standards, and subject to change without notice due to continuous development.



Hytera Communications Corporation Limited

Address: HYT Tower, Hi-Tech Industrial Park North, Beihuan Rd.,  
Nanshan District, Shenzhen, China  
Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057  
Http: //www.hytera.cn

Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Co., Ltd. © 2010 Hytera Co., Ltd. All Rights Reserved.

Your Local Dealer




UK201 01013A

**HYT**  
Two-way Radio

# POWER446

Professional  
License-free Two-way Radio

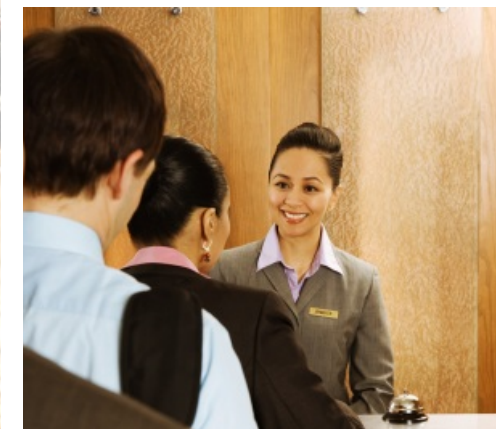

- License-free Radio
- Dust / Water Protection Class IP66
- Longer Battery Life
- Enhanced Voice Quality

www.hytera.cn

Hytera Communications Corporation Limited



Designed with usability as the priority, POWER446 excels with easy operation, clear voice and long battery time. Rugged, reliable and IP66 water / dust -proof, it enables you to focus on your task in various harsh scenarios. Take POWER446 anywhere you go, and enjoy smooth communication anytime.

# POWER446

## Professional License-free Two-way Radio

### Leading Features

#### License-free Radio

Provides you with charge-free communication easily.

#### Dust/Water Protection Class IP66

Ensures protection against dust and strong water jets.

#### Longer Battery Life

Equipped with a 2000mAh battery for 25 hours service time on a 5-5-90 basis.

#### Enhanced Voice Quality

With a 45mm speaker, POWER446 employs advanced voice technologies to better the sound quality during your communication.

### Applications

- Hospitality
- Manufacturing
- Retail
- Port
- Construction



### Main Functions

#### Monitor

CTCSS / CDCSS and Squelch Tail Elimination

VOX

Channel Scan

Battery Save

Low Battery Alert

Busy Channel Lockout

Time-out Timer (TOT)

PC Programmable

Wired Clone

Squelch Levels Selectable

### Accessories

Standard Accessories	Li-Ion Battery Power Adapter	Belt Clip Charger	Strap
----------------------	------------------------------	-------------------	-------

#### Optional Accessories

 Li-Ion Battery (1200mAh) BL1204	 Six-unit Switching Power PS7002	 Vehicle Adapter CHV09	 MCU Rapid-rate Charger (for Li-Ion/Ni-MH battery) MCA02
 Chest Pack (black) LCBN13	 Nylon Carrying Case NCN001	 Programming Cable (COM Port) PC19	 Programming Cable (USB to Serial Port) Pc26
 Earbud with on-MIC PTT & VOX ESM12	 D-earset with in-Line MIC & VOX EHM15	 D-earset with Boom MIC & VOX EHM16	 2-Wire Surveillance Earpiece with Transparent Acoustic Tube and VOX (black) EAM13
 3-Wire Surveillance Earpiece with Transparent Acoustic Tube (black/beige) EAM16/ EAM15	 Behind-the-Head Noise-Canceling Earpiece ECM14	 DLightweight Throat-Vibrating Earpiece ELM01	 Bone-Induction Earpiece EBM01
 Receive-only Earpiece with Transparent Acoustic Tube (for use with remote speaker microphone) ESS08	 Receive-only Earpiece (for use with remote speaker microphone) ESS07	 Remote Speaker Microphone SM03M3	 Noise-Canceling Remote Speaker Microphone (IP56) SM13M1

Note: Pictures above are for reference only and may vary from actual product.