



VHF MARINE TRANSCEIVER

# IC-M25EURO

## *Buoyant, Stylish and Easy to Use!*



**Float 'n' Flash feature...**

**...plus a choice of *Marine Blue* or *Metallic Grey***



**Slim, Lightweight, High Performance**



**USB Charging (Micro-B USB type)**



**11 Hours Operating Time**  
(Typical operation with Tx (Hi): Rx: Standby = 5:5:90)



**Large LCD and Simple User-Interface**



**Buoyant with Flashing Red LED**



**Optional Speaker Microphone**



**Slim, lightweight, easy to use**

The IC-M25 is extremely lightweight, weighing only 220g. Its 30.5mm slim body is extremely comfortable to handle. Large LCD display and laser cut, curved shape buttons are well laid out and provide simple and straightforward operation. In fact, the IC-M25 LCD screen is 30% larger than its predecessor, the IC-M23, allowing you to clearly see the channel number and status icons.

**USB Charging**

The IC-M25 has a Micro-B USB connector and can be charged with the supplied AC adaptor, BC-217 in 3 hours (approx.). Third party USB charger products such as cigarette lighters or mobile battery for charging smart phones, tablets or digital cameras may be used with the IC-M25\*.

\* The IC-M25 accepts 5V/1A (Max.) input. Use of third party products is not guaranteed.

**Buoyant with flashing red LED**

The IC-M25 floats when dropped in water. Not only does the LCD and key backlight on the front panel flash, but also the red LED light blinks through the rear panel showing the place of the radio so that it can be easily retrieved.

**11 Hours of Battery Life**

The built-in 1500mAh lithium-ion battery allows 11 hours (approx.) of long operation\*.

\* Typical operation with Tx (Hi): Rx: standby=5:5:90

**Optional HM-213 Speaker-Mic**

The optional waterproof speaker-microphone, HM-213, provides commercial grade convenience while mounting the radio around the waist. The radio floats even when the HM-213 is attached.

**550mW Audio Output**

The IC-M25EURO provides a powerful 550mW (typical) audio output making received voice loud and clear.

**Other Features**

- IPX7 waterproof construction (1m depth of water for 30 minutes)
- 4-step battery life indicator
- Dual/Tri-watch functions
- Instant access to Ch16 or programmable call channel
- Favourite channel function
- Monitor function opens noise squelch
- Auto scan function
- LCD auto backlighting
- AquaQuake™ draining function

**SPECIFICATIONS**

GENERAL		
Frequency range	Tx	156.000–161.450MHz
	Rx	156.000–163.425MHz
HOL version	Tx	156.000–161.600MHz
	Rx	156.000–163.425MHz
Usable channel groups	INT, USA*, ATIS* channels * Depending on version	
Type of emission	16K0G3E (FM)	
Power supply voltage	3.7V DC nominal	
Current drain (at 3.7V DC)		
	Tx	2.3A
	Rx (Internal SP/External SP)	300mA/200mA (Max. audio)
Operating temperature range	-15°C to +55°C	
Antenna impedance	50Ω	
Dimensions (W×H×D) (projections not included)	56.6×134.2×30.5mm	
Weight (approximately)	220g (With FA-SC59V and MB-133)	

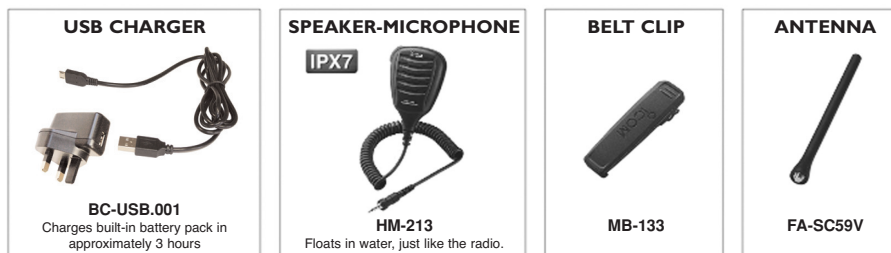
TRANSMITTER	
Output power	5W (approx.)/1W/0.5W* * For only FRG version
Max. frequency deviation	±5.0kHz
Frequency stability	±1.5kHz
Spurious emissions	0.25μW
Adjacent channel power	70dB
Residual modulation	40dB

RECEIVER	
Sensitivity	-6dBμ emf typ. (at 20dB SINAD)
Squelch sensitivity	-6dBμ emf typ. (at threshold)
Adjacent channel selectivity	70dB
Spurious response	70dB
Intermodulation	68dB
Audio output power (at 10% distortion)	Internal SP: 550mW typ. (12Ω load, at 1kHz) External SP: 200mW (4Ω load)

Measurements made in accordance with EN301-178-2. All stated specifications are subject to change without notice or obligation.

**Applicable IP Rating**

Ingress Protection Standard	
Water	IPX7 (Waterproof protection)

**OPTIONS****Supplied accessories:**